

# TG-CLEAN<sup>A/S</sup>

## TG Airug Trax

Construction of microcellular vinyl with ribbed pattern



# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Linear Lengths TG Airug Trax

Basic worker comfort derived from 9.4 mm thick worker platform comprised of a construction of microcellular vinyl consisting of millions of air bubbles.

- Ribbed pattern enhances traction
- All four sides are bevelled and sealed to minimize tripping hazards
- Slip resistance R10 according to DIN51130 and BG-rule BGR181

## Recommended use



- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Light duty

## Colors:

- Black
- Black/Yellow
- Grey

## Sizes:

- 60cm x 91cm
- 90cm x 150cm
- 122cm x 18m
- 60cm x 18m
- 91cm x 18m
- 122cm x 18.3m
- 60cm x 18.3m
- 91cm x 18.3m

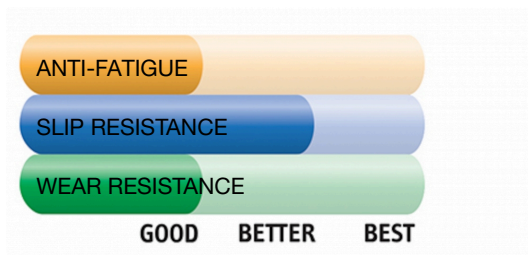

# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Linear Lengths TG Airug Trax

## General

Brand	TG-CLEAN
Category	Dry Areas Linear Lengths
Product Number	LEF410RO348BL
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	TG Airug Trax
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Værkstedsvej 24A, 4600 Køge, Denmark
Type	Dry Areas - Comfort™
Usage Intensity	Light duty

## Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material
Warranty	1

## Tests

Abrasion Resistance 1000	22.0%
Abrasion Resistance 500	12.6%
Compression Deflection 1.4	0.58 cm
Compression Deflection 2.8	0.63 cm
Elongation	160.6%
Fire rating EU	Class 2 according NFPS Safety Code 101
Fire rating US	Pass
Hardness	20 Shore A
Slip Rating	R10
Coefficient Friction Dry	0.78
Surface Flammability	Pass
Tear Strength	6.5 lb

# Technical Specifications

Application	Industrial
Breaking Load	29.1 lb
Edges	Bevelled edges on all sides
Material	Microcellular vinyl
Material Group	Vinyl
Process	Foaming

## Airug Trax Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
410C0324BL	60cm x linm	1.4	9.4
410R0336BL	91cm x 18.3m	38	9.4
410R0348BL	122cm x 18.3m	51	9.4
410R0324BL	60cm x 18.3m	26	9.4
410S0335BL	90cm x 150cm	3.2	9.4
410C0348BL	122cm x linm	2.8	9.4
410C0336BL	91cm x linm	2.1	9.4
410S0323BL	60cm x 91cm	1.3	9.4

## Airug Trax Black/Yellow

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
410C0324BY	60cm x linm	1.4	9.4
410R0348BY	122cm x 18.3m	51	9.4
410R0336BY	91cm x 18.3m	38	9.4
410R0324BY	60cm x 18.3m	26	9.4
410S0335BY	90cm x 150cm	3.2	9.4
410C0348BY	122cm x linm	2.8	9.4
410C0336BY	91cm x linm	2.1	9.4
410S0323BY	60cm x 91cm	1.3	9.4

## Airug Trax Grey

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
410R0348GY	122cm x 18.3m	51	9.4
410C0324GY	60cm x linm	1.4	9.4
410R0336GY	91cm x 18.3m	38	9.4
410R0324GY	60cm x 18.3m	26	9.4
410C0336GY	91cm x linm	2.1	9.4
410S0335GY	90cm x 150cm	3.2	9.4
410S0323GY	60cm x 91cm	1.3	9.4
410C0348GY	122cm x linm	2.8	9.4